

16V 720kHz 2A Fast-PWM Synchronous Step-Down Converter

DESCRIPTION

The MT3562 is a fully integrated high efficiency synchronous step-down converter which requires minimum number of external components. It offers very compact solution with up to 2A continuous output current over a wide input range.

The MT3562 employs proprietary Constant On-Time (COT) control scheme providing superior transient response and maintaining constant switching frequency under the continuous conduction mode operation. The external ramp compensation network allows stable operation with ultra-low equivalent series resistance (ESR) output ceramic capacitors. An internal compensated error amplifier in the control loop provides excellent line and load regulation.

The MT3562 integrates extensive protection functions include: UVLO, OCP, UVP and thermal shutdown. The converter is available in a small 6pin SOT23_6L.


FEATURES

- Input Voltage Range: 4.5V to 16V
- Output Voltage range: 0.804V to 16V
- 2A continuous output current
- Support 100% duty cycle Low Dropout Operation
- Stable operation with low ESR ceramic output capacitors
- Fast PWM COT control with superior transient performance
- 720kHz Switching frequency
- Internal 2ms Soft-start
- Integrated 90.5mΩ/ 67mΩ HS/LS Power Switches
- Accurate EN UVLO threshold
- High Efficiency Operation at light load MT3562N
- Thermal Shutdown with Auto recovery.
- Hiccup mode short circuit protection
- Available in a 6-pin SOT23_6L Package


APPLICATIONS

- Laptop Computer
- Tablet PC
- Networking Systems
- Personal Video Recorders
- Flat Panel Television and Monitors
- Distributed Power Systems

TYPICAL APPLICATIONS

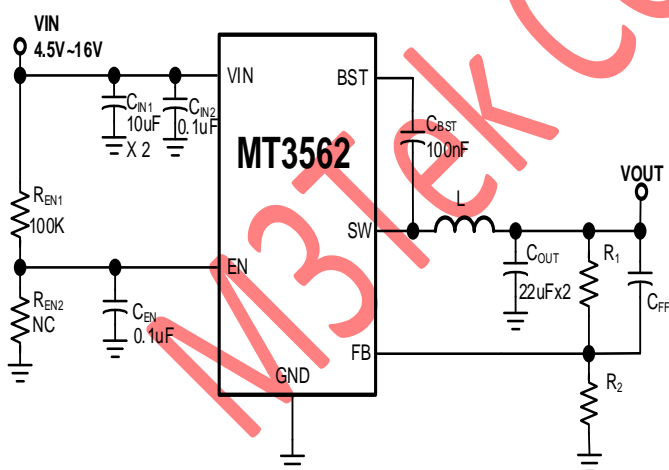

Efficiency

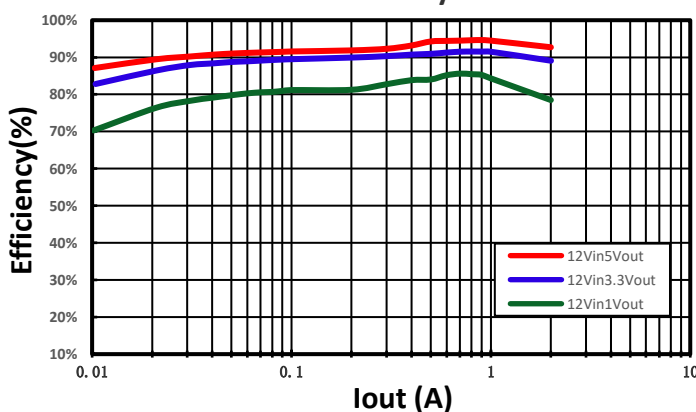


16V 720kHz 2A Fast-PWM Synchronous Step-Down Converter

Ordering Information

Part No.	Marking	Temp. Range	Package	MOQ
MT3562NSCR (Pulse Skip Mode)	3562 YWWxx	-40°C ~+85°C	SOT23_6L	3000/Tape & Reel
MT3562ASCR (Forced-PWM Mode)	3562A YWWxx	-40°C ~+85°C	SOT23_6L	3000/Tape & Reel

Note: Y: Year, WW: Week, xx: Manufacture Control Code

Pin Configuration



Pin Description

Pin Name	Pin NO.	DESCRIPTION
BST	1	Bootstrap. A 100nF ceramic capacitor connected between SW and BST pins is required to form a floating supply for the high-side switch driver.
GND	2	Power ground
FB	3	Feedback. An external resistor divider from the output to GND, tapped to the FB pin, sets the output voltage
EN	4	Enable pin. MT3562 is shut down when this pin is low and active when this pin is high. The hysteretic enable threshold voltage is 1.21V going up and 1.11V going down. Connect EN with VIN through a pull-up resistor or a resistive voltage divider for automatic startup. An external resistor divider from VIN can be used to program a VIN threshold below to stop the MT3562 operation. There is an internal 1000kΩ (typical) pull down resistor from EN to AGND.
VIN	5	Supply Voltage. The VIN pin supplies power for internal MOSFET and regulator. The MT3562 operates from a 4.5V to 16V input rail. An input capacitor is needed to decouple the input rail.
SW	6	Switch Output. Connect this pin to the inductor and bootstrap capacitor. SW node should be kept small on the PCB for good performance and low EMI.